

Intelligent Fracture Creation for Shale Gas Development

Craig C. Douglas^a, Guan Qin^a, Nathan Collier^b, and Bin Gong^c

^aUniversity of Wyoming School of Energy Resources, Laramie, WY 82071, USA

^bKing Abdullah University of Science and Technology, Thuwal, Saudi Arabia

^cPeking University Department of Energy and Resource Engineering, Beijing 100871, China

This research was supported in part by NSF grants 1018072 and 1018079, awards from the Center for Fundamentals of Subsurface Flow, School of Energy Resources, University of Wyoming, Sinopec, and Award No. KUS-C1-016-04, made by King Abdullah University of Science and Technology (KAUST).

Shale gas modeling is complex

- Shale gas appears in a large number of small fractures that are not naturally interconnected and are difficult to recover gas from.
- Natural and hydraulically induced fractures are created to connect shale gas reservoirs to make recovery of shale gas economically viable.
- *More complex than conventional reservoirs.*

Discrete fracture model (DFM)

- Each fracture represented individually and explicitly:
 - requires unstructured gridding of the fracture-matrix system using 3D (Delaunay) triangulation
 - transmissibility evaluation between each pair of adjacent cells.
- Near-well effects are modeled in detail by refining the unstructured 3D grid to the point where we fully resolve stimulated fractures.
- Very large models require an upscaling process, such as a multiple subregion procedure to allow fast computations.


Complex geometries

- Common in shale gas reservoir simulation.
- Horizontal wells and multistage hydraulic fracturing provide difficulties leading to only
 - single well simulations or
 - simple decline curve analysis.
- *More accurate reservoir simulation is key to better field management.*

Advanced simulation techniques

- Critical to reservoir management and sources of information to companies that develop and operate shale reservoirs.
- In the past, much of the simulation development has been aimed at a working field, not at creating a working field.
- *We show how a dynamic data-driven application system (DDDAS) approach can significantly enhance the creation of a fracture shale gas field.*


Different crack formulations

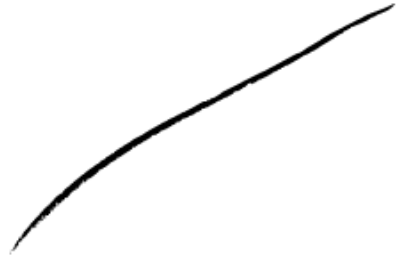

Simple Fracture



Complex Fracture

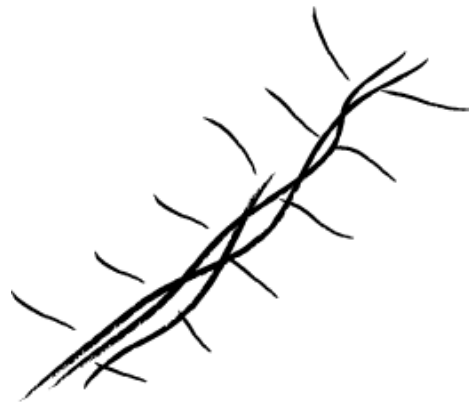

Complex Fracture
With Fissure Opening



Complex Fracture
Network

Model formulation

- DFM:
 - Each fracture is its own geometric entity.
 - DFM was difficult to use due to a lack of accurate information to describe a fractured reservoir.
 - The computational cost was prohibitive.
 - *With the ready access of relatively inexpensive fast, parallel computers, computational cost is no longer a barrier.*
 - Peta-, exa-, zetta-, ..., *darema*-scale candidate.

DFM formulation of interest

- Studied since 1970's for
 - finite element, finite difference, and finite volume methods.
 - Cartesian and unstructured grids.
- For us,
 - unstructured grid, finite volumes most accurate.
 - a connection list to represent unstructured grids in two and three dimensions with multiphase flow.
 - local grid refinement in both fractures and matrix.


Upscaling

- The multiple subregion (MSR) method is used to upscale the problems to construct attractive coarse grid problems to solve instead of fine grid ones.
- By using local subregions, the upscaled model is in a dual-porosity form.
 - Matrix rock and fractures can then exchange fluid locally in parallel with large scale flow through the fracture network.
 - A connection list including all internal and interblock transmissibilities can be created that is suitable for direct input into a reservoir simulator.

Upscaling procedure

- Three steps:
 - The coarse scale equations may be different than the fine scale ones. Hence, the upscaled parameters must be computed explicitly.
 - A local or global domain must be chosen for the upscaled parameters.
 - The boundary conditions have to be determined and post processing is applied when computing the upscaled parameters.

DDDAS workflow

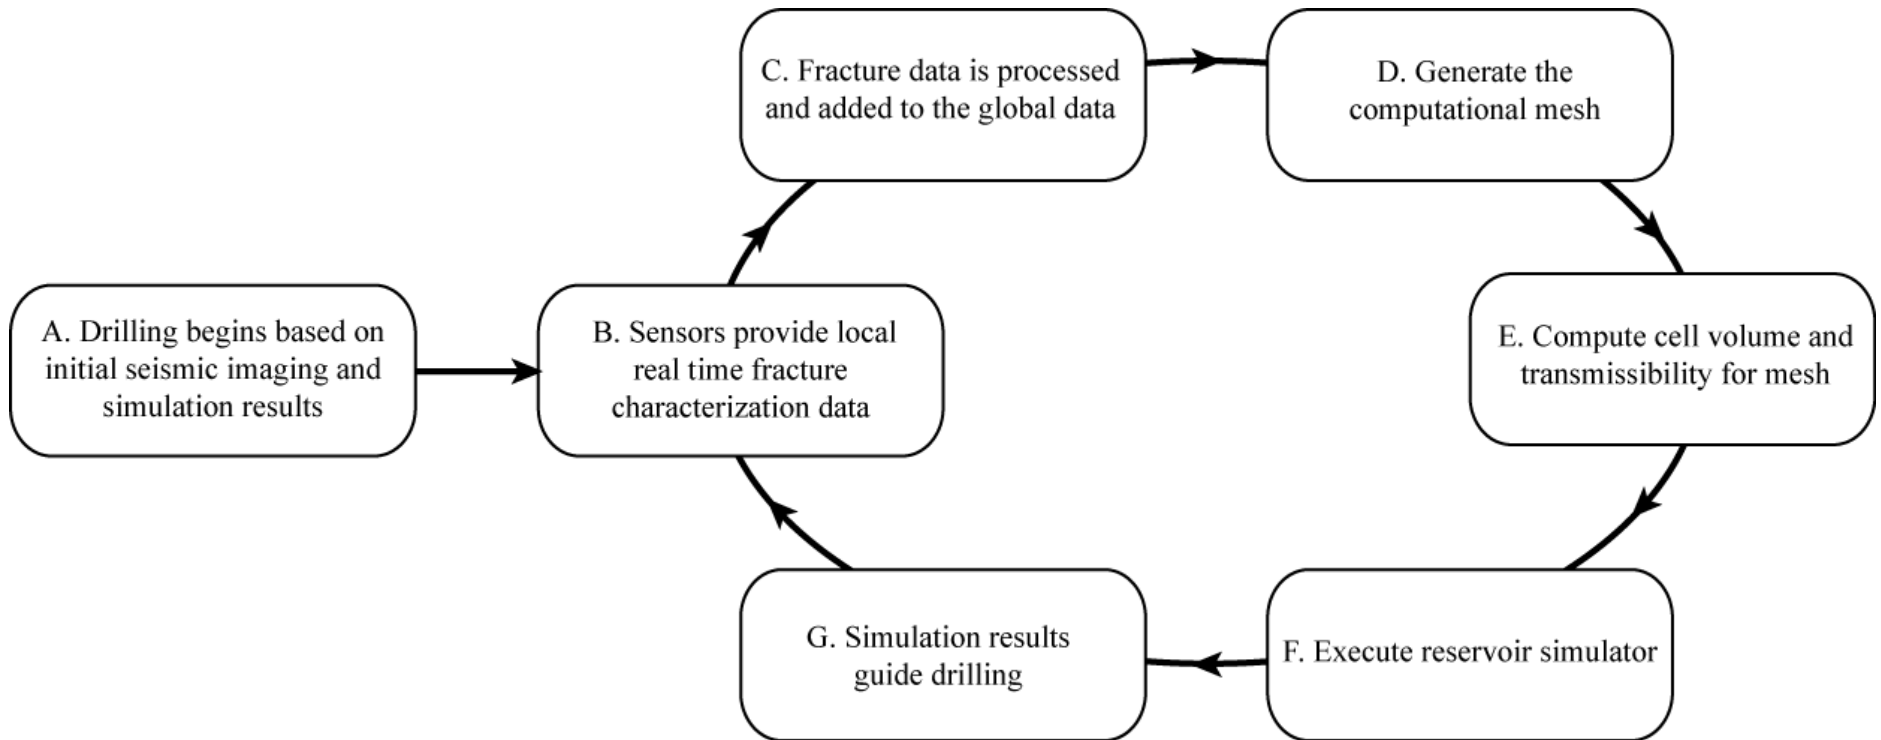

Visualization and timing


- Visualization not in workflow, but
 - Critical in steps A, C, D, F, and G.
- Complete cycle takes
 - Many months for standard collection and assimilation.
 - Tedious manual intervention in step C can be done in background while other parts done automatically.
 - *Want no person loop except as expert observer.*

Microseismic imaging

- Can show new fractures very quickly.
- Adding to map is much cheaper than a complete seismic image processing.
- Should be added in Steps B-D quickly. Integrating the data into the overall seismic image is
 - nontrivial,
 - not automatic, and
 - there have been few advances in automatically doing this step.


Example

- (a) Initial configuration with the horizontal well, the vertical well with microseismic sensors, and natural fractures

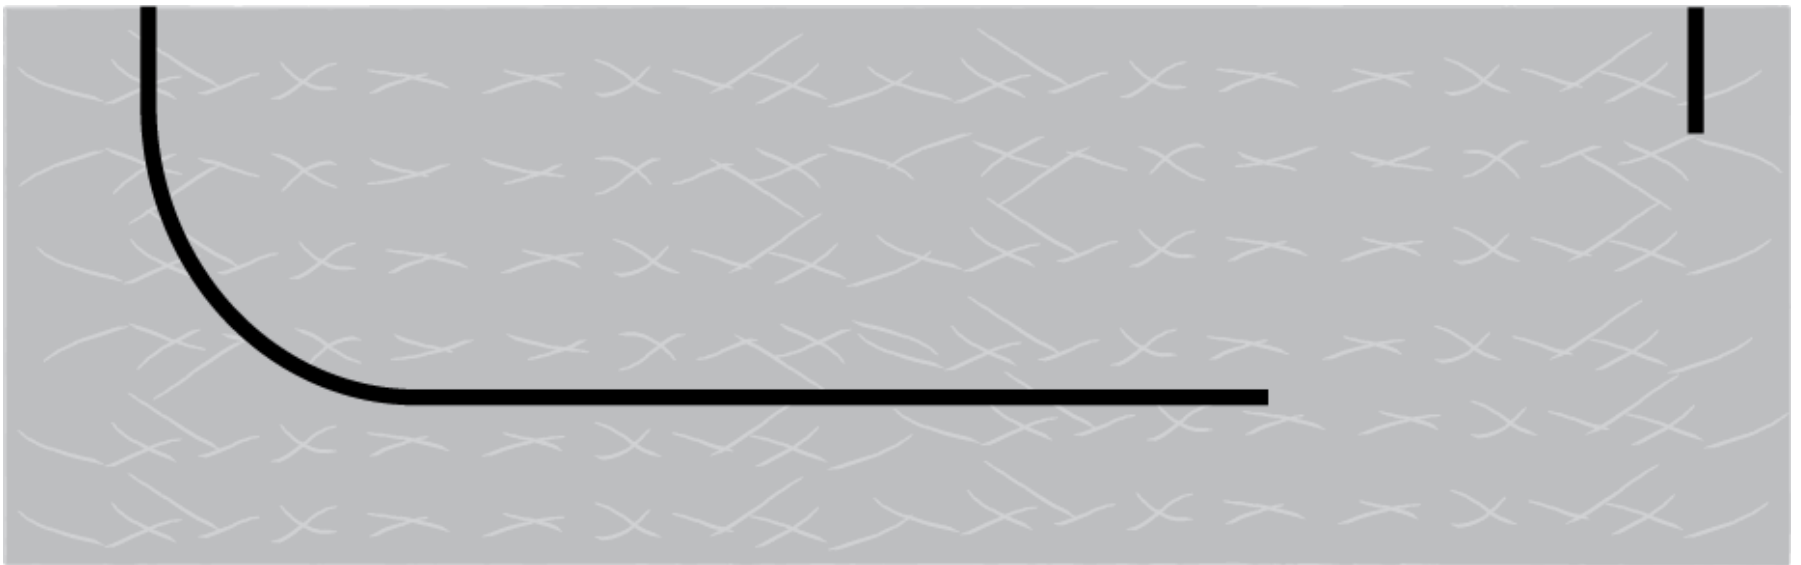


Example

- (b) Fractures after the first hydraulic fracturing process completed at far end of horizontal well

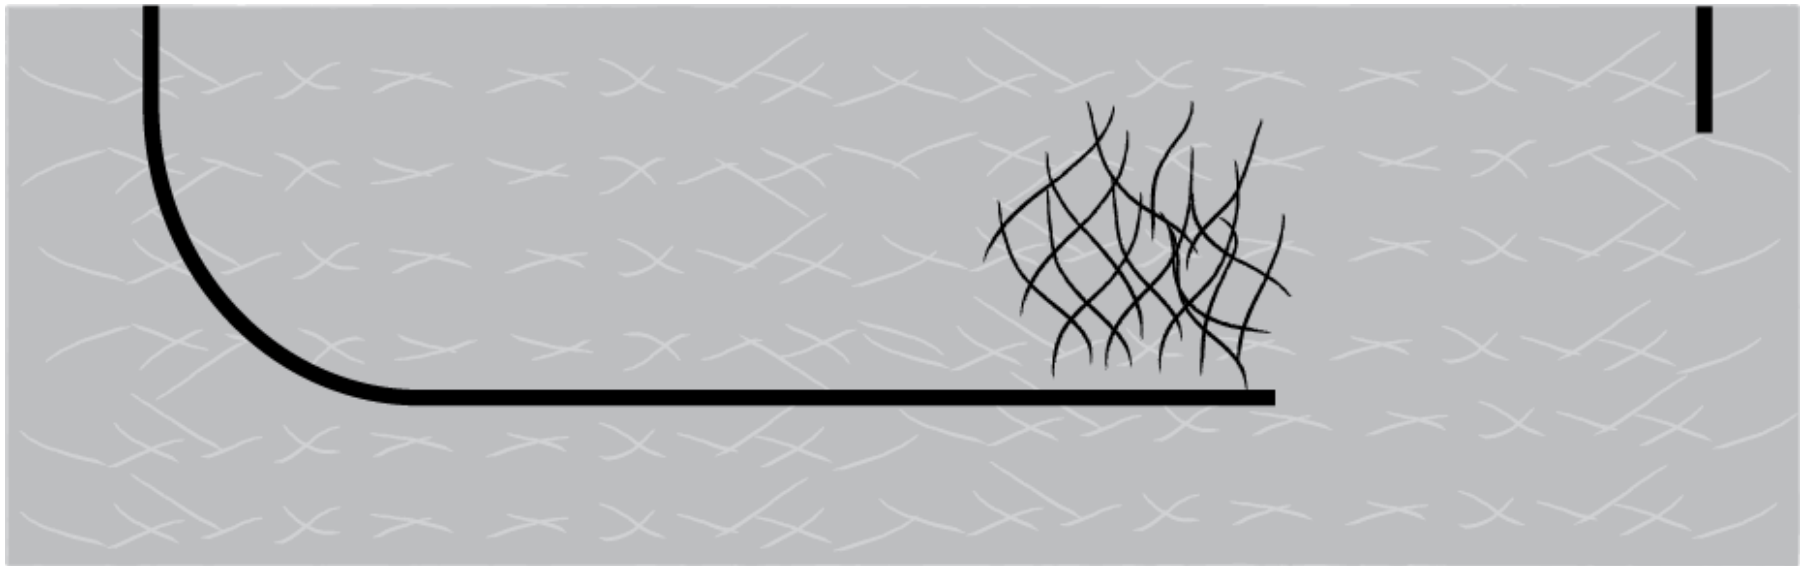


Example

- (c) Microseismic imaging to the vertical well with a plug in place in the horizontal well

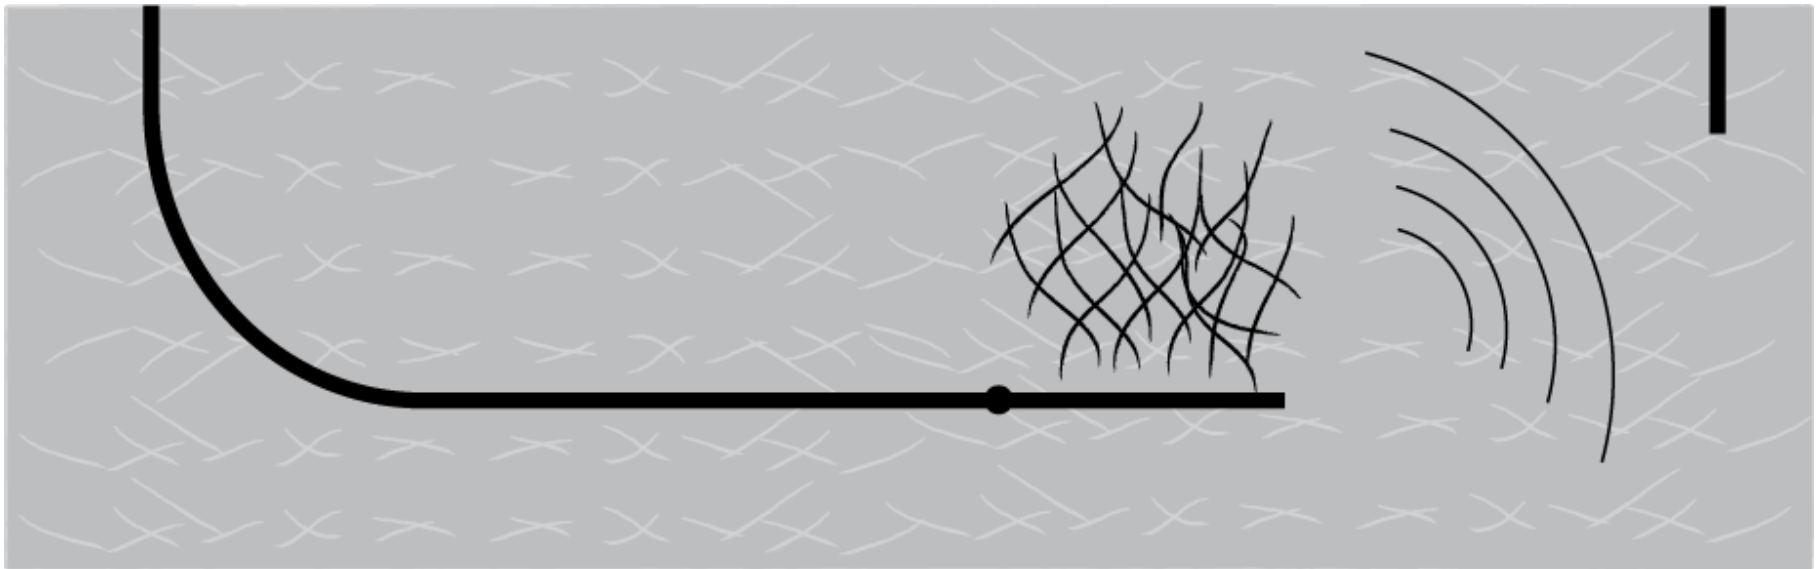

Example

- (d) Fractures after the first hydraulic fracturing process completed at far end of horizontal well

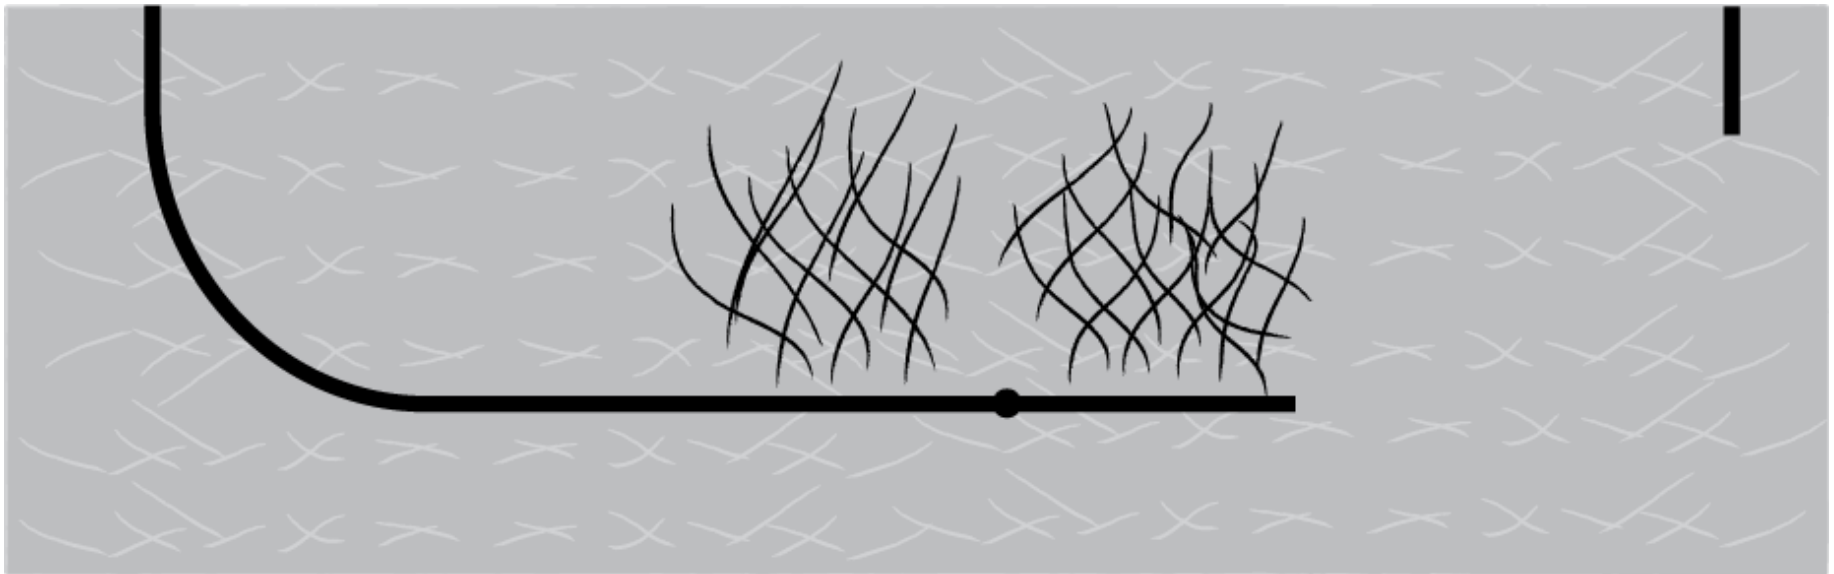

Conclusions

- We outlined a DDDAS for network fractured shale gas reservoir creation that should work well with an established reservoir model and simulation.
- A systematic workflow for a DDDAS that models shale gas reservoirs with complex fractures in fine scale (DFM) and coarse scale (MSR).
 - Ideally this methodology will be implemented for a real shale gas development project where the natural and hydraulic fracture network is mapped through borehole imaging logs, microseismic imaging, and other characterization approaches.