

Dynamic Data - Driven Brain - Machine Interfaces (DDDBMIs)

José Fortes

On behalf of the DDDBMI PI team:

Renato Figueiredo, Linda Hermer-Vazquez,
José Principe and Justin Sanchez


Brain Machine Interfaces (BMIs)

- Motor BMIs

- Translate brain electrical activity into commands to external devices
- Command BMIs or BCIs– EEG-based
- Trajectory control BMIs – based on neuronal firings/fields


- Signal processing

- Many possible models
- Real-time (20-200 ms)
- Feedback and training

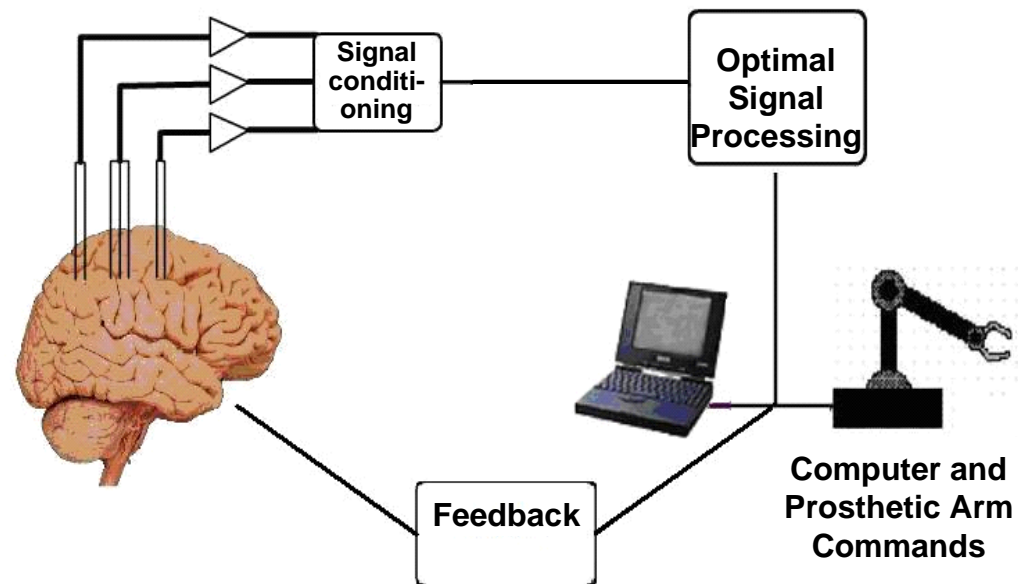

Kawato's model

- multiple model pairs
 - forward (planning): sensory input from motor commands
 - inverse (execution): motor commands from trajectory info
- output combines several models
 - data dependent
 - dynamic


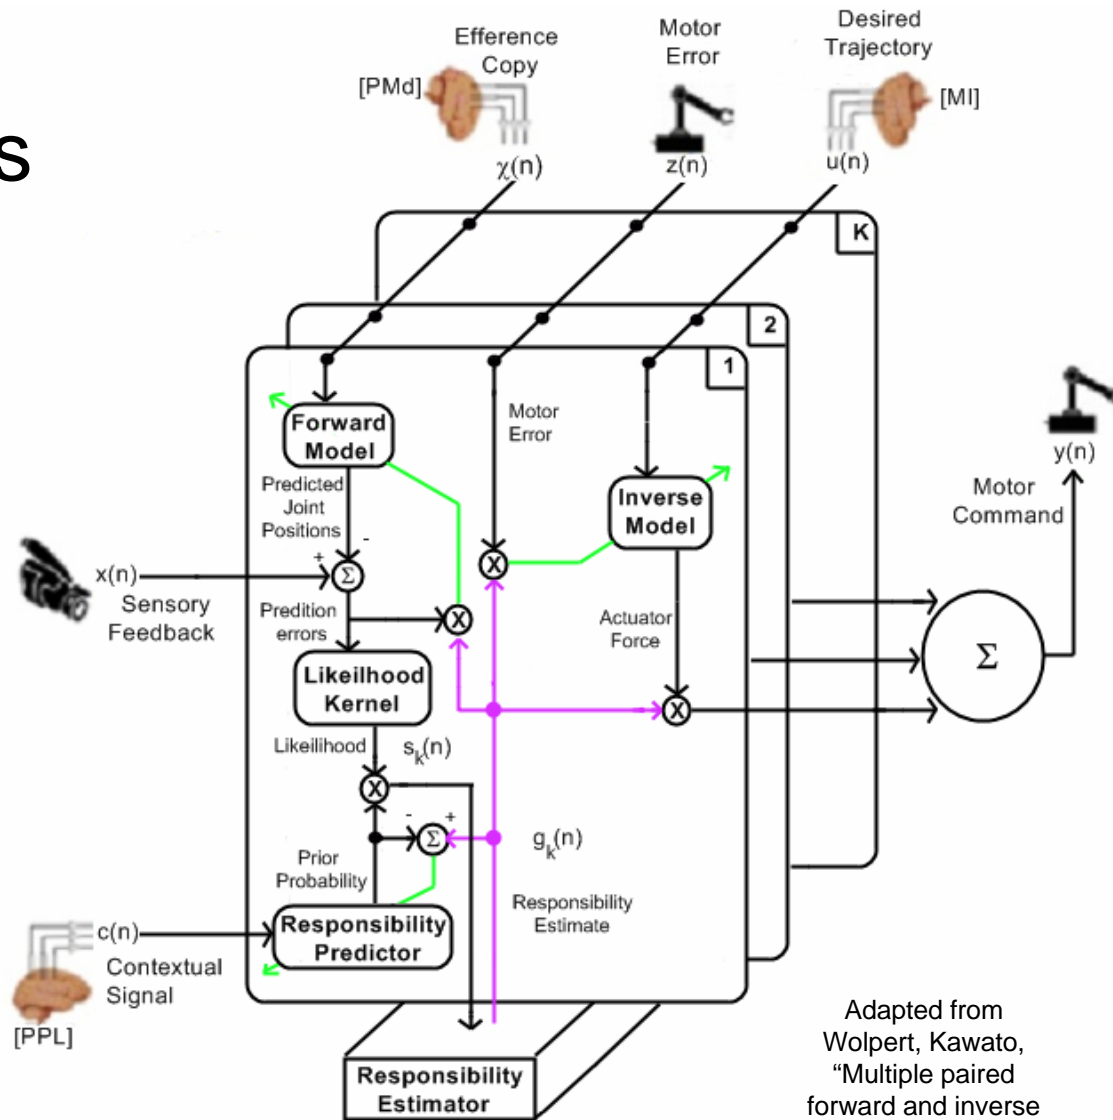


Adapted from Wolpert, Kawato, "Multiple paired forward and inverse models for motor control," Neural Networks 11 (1998)

General considerations

- Number of model pairs
 - 10s – 100s for simple tasks (e.g. press lever)
 - 1000s (?) for complex tasks
- Type of models
 - Linear (filters): Wiener, NLMS, PVA, ...
 - Nonlinear (neural nets): TDNN, RMLP, RNN, NMCLM
 - State-based: Kalman filters, Bayesian classifiers, HMMs
- Complexity of models
 - $O(n)$, $O(n^2)$, $O(mn^2)$, $O(n^3)$, ...
 - for n neurons, m models

Basic computation structure

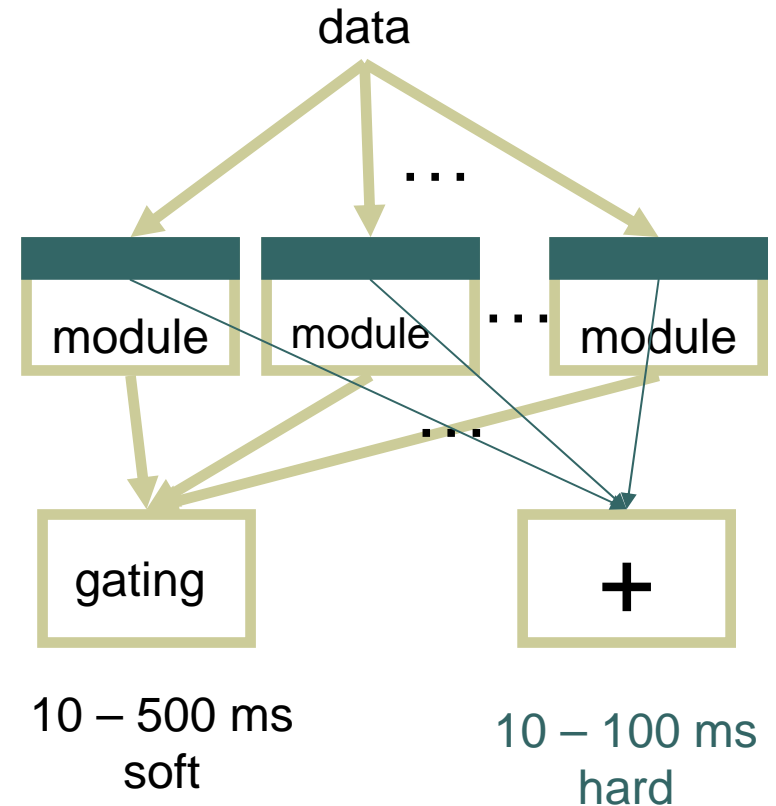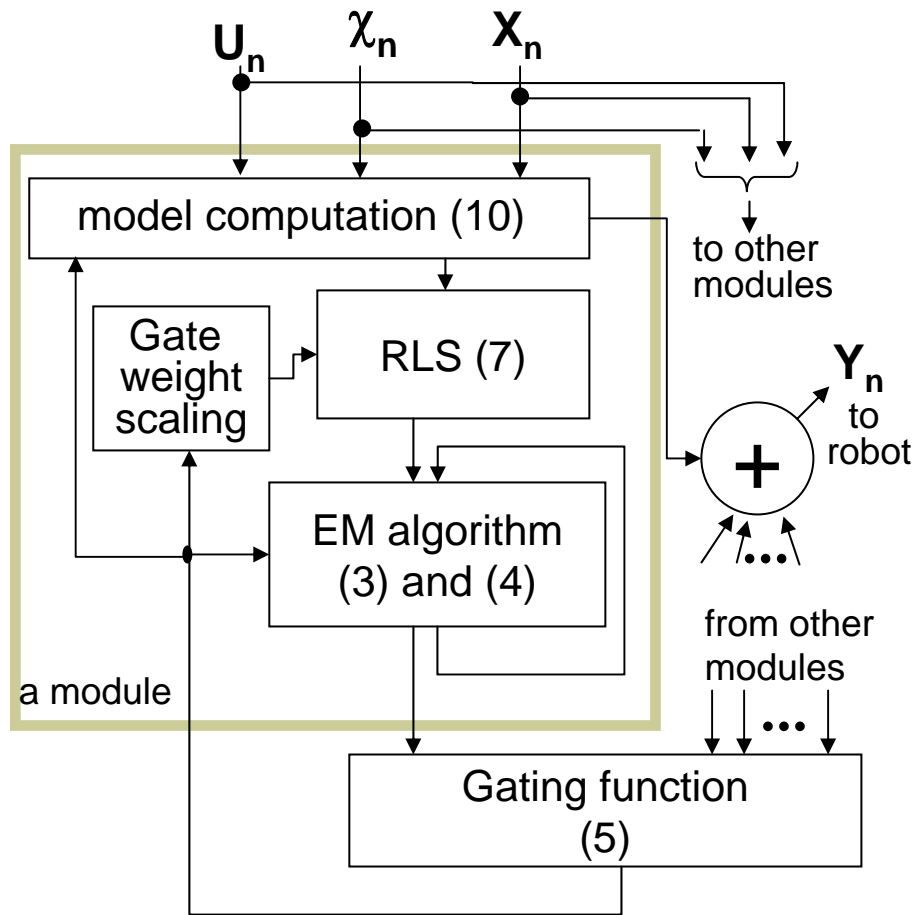

- Online – real-time (hard and soft deadlines)
- Offline – recreation of experiments from data in storage

Requirements for Grid-based DDDDBMIs

1. resource discovery based on quality of service specifications and scheduling based on virtual machine reservations,
2. dynamic steering of applications to computing resources based on run-time feedback from application inputs.

